RG, QJ & RO
Transmissions

Power shift solutions for feed mixers

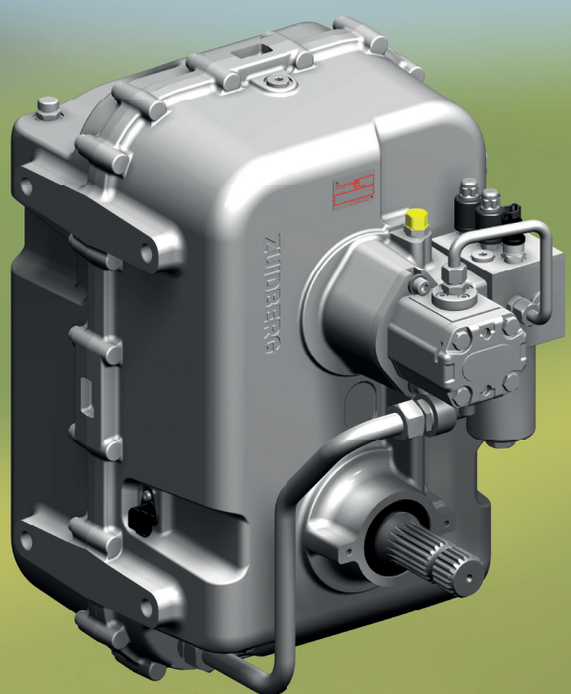

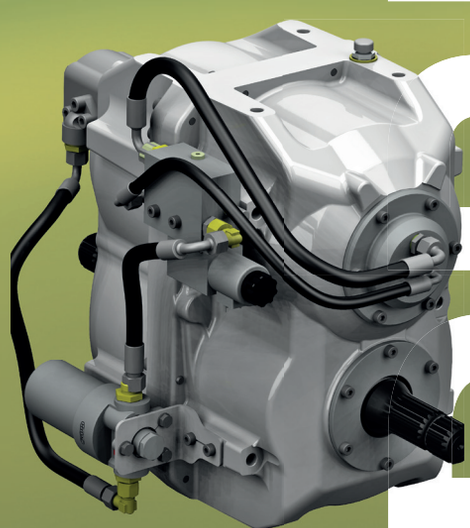

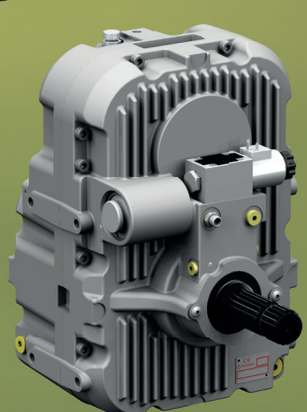

ZUIDBERG

Shift on the fly

Saves fuel, reduces load on tractor

Low noise & smooth run

Designed for continious heavy operation

Shift smarter, mix better.

Product specifications

	RG (2 speed)	QJ (2 speed)	RO (3 speed)
Ratio variants	1.48:1 / 1:1 1.77:1 / 1:1	2.10:1 / 1.21:1 1.83:1 / 1.2:1 1.83:1 / 1.05:1 1.52:1 / 1:1	3.24:1 / 1.79:1 / 1:1 2.79:1 / 1.54:1 / 1:1
Nominal power [kW]	**130**	540 rpm **115** | 1000 rpm **180**	**210**
Max. input torque [Nm]	**1810**	**2500**	**2500**
Nom. input torque [Nm]	**1240**	540 rpm **2030** | 1000 rpm **1700**	**2000**
Input speed [rpm]	**1000**	**540 - 1000**	**1000**
Input shaft	1-3/4"20- spline ISO 500-3	1-3/4"20-spline ISO 500-3 or 1 3/4" 6-spline ASAE	1-3/4"20-spline ISO 500-3
Output shaft	1-3/4"20- spline ISO 500-3	1-3/4"20-spline ISO 500-3 or 1 3/4" 6-spline ASAE	1-3/4"20-spline ISO 500-3
Weight [kg]	**137**	**205**	**285**

RG





QJ





RO





Dimensions in millimeters

Additional information

- Gearboxes RG and QJ are available in both horizontal and vertical configuration (vertical configuration shown)
- Gearboxes to be installed with oil cooler
- Gearboxes are supplied with protection cover at the input
- All gearboxes have an integrated freewheel functionality

Buitenveld 5
8307 DE Ens, The Netherlands
T +31 527 253 550
info@zuidberg.nl